Bat Likelihood of Occurrence Report
Cimarron Wind Energy Project – Phase 1
Gray County, Kansas

Prepared For:

CPV Cimarron Renewable Energy Company, LLC
50 Braintree Hill Office Park, Suite 300
Braintree, Massachusetts 02184

Prepared By:

Tetra Tech EC, Inc.
160 Federal Street, 3rd Floor
Boston, Massachusetts 02110

November 2010

EXECUTIVE SUMMARY

Tetra Tech EC, Inc. (Tetra Tech) was contracted by CPV Cimarron Renewable Energy Company, LLC (CPV) to assess the potential likelihood of occurrence of bats within the Cimarron Wind Energy Project – Phase 1 location (WEP) in Gray County, Kansas. The objective of this likelihood of occurrence analysis was to evaluate the biological and landscape features of the WEP to determine the potential for bats to occur. Thus, Tetra Tech developed a likelihood index based on habitat-based variables and species-based variables. Habitat-based variables include the amount of suitable foraging and roosting habitat, the number of natural areas, number of perennial streams, and number of human developments. Species-based variables included bat species known to occur in the region and behavioral characteristics. The likelihood index does not predict how many bats will occur or the anticipated bat mortality level, rather it scores a site based on a suite of variables that are related to bats. Bat presence is more likely to occur over the life of a project at a project with a higher score, thus indicating higher likelihood of occurrence and, thus, potential for turbine-related fatalities given the patterns of bat fatalities at other wind energy facilities in the United States.

Of the 46 bat species in the United States, 18 occur in Kansas. Of these 18 species, 11 potentially occur within the proposed WEP based on known distribution ranges. None of these 11 species are federally listed as threatened or endangered. Two of the 11 species that could potentially occur within the WEP – pallid bat and Townsend's big-eared bat – are listed as Species in Need of Conservation in Kansas. Overall, Tetra Tech estimates a low likelihood of occurrence for bat species for the entire WEP. Although the WEP contains a low absolute amount of potentially suitable bat habitat, when viewed on a regional scale the WEP contains almost three times as much habitat as the surrounding buffer, indicating a relative attractiveness of the habitat within WEP to the 11 bat species that could potentially be found using or traveling through the WEP. Most of this potentially attractive habitat is found in the northeast corner of the WEP.

TABLE OF CONTENTS

EXECUTIVE SUMMARY ES-1

1.0 INTRODUCTION 1

2.0 BATS AND WIND ENERGY 1

3.0 STATUS OF BATS IN KANSAS 1

4.0 ENVIRONMENTAL SETTING AND PROJECT AREA DESCRIPTION 2
- 4.1 Project Area Description 2
- 4.2 Environmental Setting 2

5.0 GENERAL BAT BIOLOGY 2
- 5.1 Roosting Habitat 2
- 5.2 Foraging Ecology 3
- 5.3 Migration Behavior 3

6.0 ASSESSMENT OF BAT LIKELIHOOD OF OCCURENCE 3
- 6.1 Forest-Aquatic Matrix 4
- 6.2 Natural Areas 5
- 6.3 Perennial Streams 5
- 6.4 Human Development 6
- 6.5 Species Ranking Index 6
- 6.6 Species Landscape Index 7

7.0 CIMARRON WEP ASSESSMENT AND SUMMARY 8

8.0 LITERATURE CITED 8

TABLES

Table 1. Life history, behavior and habitat preferences of bat species for Cimarron WEP, Kansas.

Table 2. Total amount of forest-aquatic matrix (FAM) habitat and percent composition within the Cimarron WEP and the respective 3-mile buffer.

Table 3. Ranked scoring system used to develop species risk index for bat species found in south-central Kansas.

Table 4. Summary statistics for each variable used in the analysis.

FIGURES

Figure 1. Cimarron Wind Energy Project Vicinity Map

Figure 2. Representation of elements used to calculate FAP

Figure 3. Cimarron WEP Bat Habitat Map

1.0 INTRODUCTION

CPV Cimarron Wind Energy Company, LLC (CPV) is currently developing plans for a wind energy facility in Gray County, Kansas (Figure 1). Recent monitoring studies indicate that utility-scale wind energy facilities have had greater bat mortality than was expected based on early monitoring studies where birds were the primary focus of attention (NRC 2007). CPV contracted Tetra Tech EC, Inc. (Tetra Tech) to conduct an in-depth literature review and landscape scale analysis to assess the potential occurrence and risk for bat species that may occur within the Cimarron Wind Energy Project – Phase 1 (WEP). Although, to date, there is no clear relationship between pre-construction occurrence and post-construction mortality, certain features of a project may make it more or less attractive to bats, thus increasing or decreasing the relative mortality risk. Tetra Tech developed a likelihood index to evaluate the WEP based on the number of species potentially occurring in the WEP, the amount of suitable foraging and roosting habitat within the WEP and the surrounding landscape, and several additional factors that were likely to increase the presence of bats including the presence of perennial streams, number of human developments, and the number of natural areas. The likelihood index does not predict bat occurrence or mortality. Rather, it scores the project based on a suite of variables that are related to occurrence and potential mortality. Bat presence is more likely to occur over the life of a project at a project with a higher score, thus indicating higher likelihood of occurrence and, thus, potential for turbine-related fatalities given the patterns of bat fatalities at other wind energy facilities in the United States.

2.0 BATS AND WIND ENERGY

Wind energy is one of the fastest growing sectors of the energy industry (NRC 2007) and has led to unexpected levels of bat mortality (Kunz et al. 2007). Several variables may contribute to the fatalities of bats at wind facilities including, but not limited to, biology of the bat species, season, region, and turbine design (Kunz et al. 2007). Species that have the highest risk of fatalities at wind facilities are tree, foliage, or cavity roosting migratory bats (Kunz et al. 2007; Arnett et al. 2008). Nearly 75 percent of all bat fatalities have been associated with migratory tree bats including the hoary bat, eastern red bat and silver-haired bat, all three of which occur within the range of the WEP. Migratory bats travel long distances at altitudes occupied by wind turbine blades, making them susceptible to collisions. The probability of mortality events increases during periods of poor weather, such as just before or after the passing of a storm front (Arnett et al. 2008).

There is a seasonal trend with bat fatalities at wind facilities, with spikes occurring in the late summer and early autumn, which coincide with fall migration or dispersing juveniles that may be more prone to collisions with structures (Johnson 2004, 2005); however, Kunz et al. (2007) speculate that this is a function of intensive carcass searches during this time and not due to seasonal factors. Many, if not most, of the bat species detected as fatalities at wind facilities in the United States (Arnett et al. 2008) are also resident during spring and summer months (Barbour and Davies 1969).

There are geographic differences in fatalities/megawatt (MW)/year among bat species, ranging from 0.2 to 53.3 bats/MW/year, with the highest fatalities being reported along forested ridges in the eastern United States (Arnett et al. 2008). The potential for bat collisions with turbines is highest in the forested regions of the eastern part of the United States (NWCC 2004); however, relatively high numbers of bat fatalities have been documented in the mixed-grass plains and agricultural regions of Iowa (Jain 2005), Oklahoma (Piorkowski 2006), and Minnesota (Johnson et al. 2004).

3.0 STATUS OF BATS IN KANSAS

Of the 46 bat species in the United States, 18 occur in Kansas (ASM 2007). Of these 18 species, 11 potentially occur within the WEP based on known distribution ranges (ASM 2007, NatureServe 2008,

BCI 2009; Table 1). Two of the 11 species that could potentially occur within the WEP – pallid bat and Townsend's big-eared bat – are listed as Species in Need of Conservation in Kansas (KDWP 2008). A Kansas Species in Need of Conservation is defined as "any nongame species deemed to require conservation measures in attempt to keep the species from becoming a threatened or endangered species." These species are monitored by state wildlife agencies but do not receive any formal protection or regulatory provisions at a state level. Three of the 11 species that could potentially occur on the WEP – hoary bat, silver-haired bat, and eastern red bat – are highly migratory and are found in the greatest abundance in Kansas during May through September (Cryan 2003).

Bats rank among North America's least studied wildlife, yet declines in population numbers among all species have been documented since the 1960s (Tuttle 2004). Compared to bird species, there are relatively few laws that protect bats. On federal lands such as National Forests, National Wildlife Refuges, and lands administered by the Bureau of Land Management, agencies have developed habitat management guidelines and other regulations to enhance or minimize disturbance to habitats. Existing environmental laws primarily address the protection of caves and wanton destruction of wildlife. The protection and regulation of non-threatened bat species on private lands is typically left at the state wildlife agencies' discretion.

4.0 ENVIRONMENTAL SETTING AND PROJECT AREA DESCRIPTION

4.1 Project Area Description

The WEP is on privately owned lands within an approximately 12,000-acre region of rural land under easement with CPV in Foote Township, an unincorporated portion of Gray County (Figure 1). The WEP area is located southwest of central Kansas, approximately 1.5 miles north of the City of Cimarron (the seat of Gray County), 11 miles northwest of Dodge City, and 14 miles east of Garden City. The WEP area is characteristic of this region, with the majority of the land surface currently covered by agriculture, rangelands, and native prairie. The area contains some small playa wetlands that consist of shallow, vegetated depressions. Residences and abandoned farmsteads are scattered throughout the WEP. Patches of trees and shrubs exist throughout the WEP, and are found primarily between agricultural fields, in drainages, and as shelter belts around homesteads and between agricultural fields.

4.2 Environmental Setting

The proposed WEP is located in southwestern Kansas in Gray County. The regional topography is characterized as relatively flat with some shallow stream drainages and a range in elevation from about 2,700 to 2,800 feet above mean sea level (Tetra Tech 2008). The United States Geological Survey (USGS) 1:100,000 scale quadrangles for the region is the Dodge City Quadrangle. Land use is predominantly dry-land farming of corn and sunflowers interspersed with cattle grazing.

5.0 GENERAL BAT BIOLOGY

5.1 Roosting Habitat

Bats depend on roosts for hibernation, mating, rearing of young, protection from predators, and protection from adverse weather conditions (Lacki et al. 2007). Due to bats' dependence on these structures during all stages of their life cycle, they have been identified as the key factor in the survival of bats in North America (Kunz 1982, Pierson 1998, Kunz and Lumsden 2003).

Generally, bats can be divided into three broad roosting categories: tree roosting, cave roosting, and species adapted to roosting in multiple habitats. Many bat species that are found in Kansas exhibit a seasonal shift in habitat where they may use trees for roosting in the summer and then use rocky outcrops,

caves, or other structures for hibernation during the winter; other species may utilize a single habitat year-round. In states such as Kansas where roost habitat is limited due to the fragmentation of tree stands caused by agricultural activities; roost availability may be a limiting factor in bat species occurrence and distribution (Carter and Menzel 2003).

5.2 Foraging Ecology

The need for resources occurs during three general life-history periods: maternity, migration, and hibernation (Lacki et al. 2007). This section focuses on foraging behavior during the summer maternity season. All the bat species found in Kansas are insectivorous and feed on a variety of prey including moths, beetles, flies, and mosquitoes – many of which are agricultural pests. Their importance for controlling these pests equates to millions of dollars in savings from loss of crops, and by minimizing the application of pesticides (BCI 2001).

Selection of resources is a hierarchical process of behavioral choices by bats that results in a differential use of habitats (Block and Brennan 1993). Resources such as type and size of foraging habitat and the selection of prey are species-specific and dependent of the species' energetic needs, sex and reproductive status. The availability and suitability of resources in a landscape may affect the size of the foraging areas and commuting distances to them (Lacki et al. 2007). Species typically choose areas high in prey concentrations in a number of diverse habitats such as riparian areas (Waldien and Hayes 2001), water bodies (Henry et al. 2002), streetlights (Rydell 1992) or forest edges; however, the commonality in most studies is the proximity to water (Carter et al. 2002).

5.3 Migration Behavior

Bat migration is defined as a seasonal, usually two-way, movement from one place or habitat to another to avoid unfavorable climatic conditions and to seek more favorable energetic conditions (Fleming and Eby 2003). This annual shift in distribution is generalized by individuals occupying northern latitudes during the summer and southern latitudes during the winter (Cryan 2003). Migratory tree-roosting species that travel long distances tend to form larger aggregations than species that exhibit partial migration or are year-round residents (Fleming and Eby 2003). How species form groups is unclear, yet there is evidence that the sexes separate during migration (BCI 2001, Cryan 2003). Typically, mating occurs in the fall, either during migration or prior to hibernation with the young being born the following spring.

6.0 ASSESSMENT OF BAT LIKELIHOOD OF OCCURENCE

The primary threats of wind energy facilities to bats are fatalities associated with wind turbines and loss of roosting and foraging habitat due to direct clearing of habitat during construction. Because of the high levels of concern regarding bats, the ability to evaluate the risk to bats at an individual project is a critical component to understanding the environmental impacts of a proposed wind facility. There is no clear relationship between pre-construction occurrence and post-construction mortality; however, certain features of landscapes may make them more attractive to bats. Here, Tetra Tech presents a method used to evaluate the likelihood of bat occurrence at a given project. This evaluation method includes the use of both habitat- and species-based variables. Identifying the habitat-based variables essential to the species' requirements during roosting and foraging is key in determining the suitability of the habitat (Duchamp et al. 2004), whereas understanding the species' ecology and behavior is key in developing a model that leads to understanding the relative risk from wind energy development. Habitat-based variables include the amount of suitable foraging and roosting habitat, the number of natural areas, the number of perennial streams, and the number of human developments. Species-based variables included using bat species known to occur in the region and behavioral characteristics. Specific details about each variable and how they were used to estimate likelihood are presented below.

6.1 Forest-Aquatic Matrix

Biological Justification

Landscapes that contain a greater amount of roosting and foraging habitat are expected to be more attractive to bats. Specifically, research shows there is a strong relationship between the number of individuals and species composition with the presence of water and forests or small tree stands (Everette et al. 2001). In Kansas, roosting habitat includes trees found in forested patches, along riparian corridors, and around homesteads. Water features are typically used for foraging and include ephemeral and perennial wetlands, streams, rivers, ponds and lakes (Carter et al. 2002). For the purposes of this analysis, the foraging distance was defined as a radius of 0.8 mile, which corresponds to the average maximum foraging distance of the bat species found in Kansas (Hutchinson and Lacki 2000). In addition, habitats associated with Kansas bats that are within 3.0 miles of the WEP were evaluated to determine the attractiveness of the project to bats on a landscape scale and account for bat species' movement into and out of the WEP. Three miles was selected as an appropriate analysis distance because it was approximately triple the maximum foraging distance; therefore, 3 miles should provide a conservative estimate of bat use into and out of the WEP. Furthermore, this 3-mile buffer accommodates the foraging distances recorded for the bat species potentially occurring within the WEP (Table 1).

Scoring

To quantify the amount of roosting and foraging habitat in the WEP, Geographic Information Systems (GIS) land-cover data was obtained for Kansas. The degree of resolution incorporated in the datasets accurately depicted shelterbelts, field windbreaks and other planted woodlands represented on USGS 7.5-minute maps (USGS 2007). The accuracy and spatial extent of waters was verified with National Wetlands Inventory (NWI; USFWS 2006) data and hydrologic features represented on USGS topographic maps. However, it is possible that agricultural conversion and long term drought have substantially reduced the extent of hydrologic features on the site, and thereby reduced the amount of available bat habitat.

Using these datasets, minimum thresholds for habitat sizes were generated. The minimum area for forest features was set at one acre whereas the minimum area for water features was set at 0.004 acre. All wetlands within 0.8 mile of a forested area represent a forest aquatic patch (FAP). Each habitat type (forest and wetland) included an additional 75-foot area beyond the habitat to account for foraging and flight behavior immediately adjacent to each habitat (i.e., a buffer area; Figure 2). The total area of the FAP includes the bat habitat, the buffer area around the habitats, and the area between them. The model is nonrestrictive and includes FAPs if they are within 0.8 mile of another FAP, provided an additional forested area is within the WEP. When multiple FAPs are combined, they are referred to as a forest-aquatic matrix (FAM). Based on Tetra Tech's professional judgment and experience, areas that contained 1 to 25,000 acres received a ranking of low, areas that contained 25,001 to 50,000 acres received a ranking of moderate, and more than 50,001 acres received a ranking of high. The greater amount of FAM in a particular area, the higher the likelihood bats would occur.

FAM Assumptions

- The maximum foraging area includes the estimated foraging range expected by bat species found in Kansas regardless of sex, reproductive condition, age, energetic requirements or other life history traits.
- Each woodland feature in the dataset is considered available and suitable, regardless of plant species composition, age, density, or patch size. Similarly, each water feature in the dataset is considered available and suitable, regardless of type or size.
- Those habitats not classified as forest or water would be considered of neutral value to bats.

- The GIS datasets used in this analysis accurately reflect current land cover conditions.

Field Verification

To better assess the habitat of the WEP, Tetra Tech made a two-day visit to the WEP on October 31 and November 1, 2008. Any areas deemed to be unfit to support foraging or roosting bats (e.g., insufficient vertical complexity) were removed from the analysis. Tetra Tech made a second site visit in April 2010 to assess whether the 2008 conditions were still valid. The field verification effort ground-truthed a number of mapped wetlands previously used in the analysis and determined that many were in fact non-existent. The field visits resulted in the removal of 181 acres of wetland and no acres of forest from the analysis; no acreage of either type was added.

6.2 Natural Areas

Biological Justification

Wildlife management areas, wildlife refuges, state parks and recreation sites, hereafter natural areas, typically have woodland and water habitats that are attractive to bats (Everette et al. 2001, Swier 2003, Jain 2005). Swier (2003) selectively sampled in these natural areas due to the increased possibility of detections, whereas a study in Iowa found higher bat activity at a natural area than in the adjacent project (Jain 2005). In contrast, Jain's study did not find a significant relationship between distance to the nearest natural area and bat activity in the study area. In order to provide a conservative estimate of potential bat use and activity, Tetra Tech has assumed that natural areas may play a role in the habitat selection process by providing suitable roosting and foraging habitat.

Scoring

The total number of natural areas in and within 3 miles of the WEP were counted using readily accessible landownership data. Three miles was chosen as a distance from the WEP to account for species movement during foraging activity and to match the buffer used in FAM calculations. Information on lands in the WEP enrolled in the Conservation Reserve Program (CRP) have not been made available to CPV and, therefore, not included in the evaluation. The total number of natural areas were counted in the WEP and assigned to a category with a corresponding score based on the total number of natural areas found. Based on Tetra Tech's professional judgment and experience, assigned rankings were low for 1 to 10 natural areas, moderate for 11 to 30 natural areas, and high for 31 or more natural areas.

Natural Area Assumptions

- Each natural area provides an equal value to bat species regardless of size, current habitat and management objective.
- Data obtained from the Kansas Department of Wildlife and Parks represents the most current data available.

6.3 Perennial Streams

Biological Justification

There is a lack of studies investigating bat foraging requirements in Kansas. However, inferences can be made from other studies, typically those involving forest-dwelling bats. One common theme among studies of foraging bats is the importance of perennial streams, rivers, riparian areas, ponds or other forms of open water. From arid habitats (Bell 1980) to forested habitats (Wilhide et al. 1998), studies suggest that the proximity of water (suitable foraging habitat) to suitable roosting habitat is a critical variable in determining species occurrence (Carter et al. 2002). Bats have been documented to travel longer distances to reach these types of foraging areas that provide higher concentrations of prey and water quality (Hayes and Loeb 2007).

Scoring

The presence of perennial streams in the WEP was evaluated using hydrological data from the NWI (USFWS 2006), National Land Cover Database (NLCD; USGS 2007), and existing resource reports produced for the WEP. Based on Tetra Tech's professional judgment and experience, each area was given a score based on the presence or absence of this type of water feature. If there were no perennial streams within the WEP, it received a ranking of low. If there was one perennial stream within the WEP, it received a ranking of moderate. If there was more than one perennial stream within the WRA, it received a ranking of high.

Perennial Stream Assumptions

- All perennial streams are used equally, regardless of size, length and characteristics of riparian habitat.
- Water qualities of all perennial streams are similar and produce the same type of density of prey items.
- Perennial streams depicted in utilized databases have not been altered (diverted, dewatered, drought) to produce ephemeral conditions.

6.4 Human Development

Biological Justification

Planted vegetation and human structures can serve as suitable roost habitat for some bat species due to the overall increased availability of natural (trees, caves, outcrops) and human-made (houses, barns, bridges) roosts across the landscape (Everette et al. 2001, Swier 2003). This availability of suitable roosting habitat may lead to a higher abundance of species that are adapted to multiple roosting substrates, provided there is also suitable foraging habitat available nearby (Evelyn et al. 2004).

Scoring

All towns in and within 3 miles of the WEP were identified using the NLCD data (USGS 2007) for Kansas. Towns with populations greater then 50 (as of the 2000 census) were tallied, and a corresponding score was assigned. Based on Tetra Tech's professional judgment and experience, the WEP received a ranking of low if there 0-2 towns within 3 miles, a ranking of moderate for 3-4 towns, and a ranking of high for 5 or more towns.

Structure and Human Development Assumptions

- The housing/population density of developments within a town has no affect on the suitability for bats.
- Habitat availability and suitability is similar between towns regardless of surrounding habitat features.
- Smaller communities or isolated residences such as farms and structures such as bridges, overpasses and culverts are assumed to be uniformly distributed over the area.

6.5 Species Ranking Index

Biological Justification

The defining characteristic that differentiates mortality rates among bat species at operating wind facilities appears to be correlated with species life-history traits. Migratory tree-roosting bats are known to have a higher risk of mortality at wind facilities then resident bat species (Kunz et al. 2007), although

large numbers of resident bat species have also been reported during post-construction mortality searches (Kerns and Kerlinger 2004, Jain 2005). In order to reflect this differential risk, a species-based index was calculated to reflect the relative risk to all bats found at a project based on individual species' life history traits and documented mortality at other existing wind energy facilities.

Scoring

A species ranking index was developed by Tetra Tech to provide a single score that incorporates the species diversity and the relative morality risk for each species found within the WEP. Species occurrence was estimated using range maps, historic occurrences, and habitat characteristics from landcover data. Because mortality events are not uniform among species, species were assigned a score that reflected their mortality risk. Higher scores were assigned to common, migratory tree bats and lower scores were assigned to less abundant species or to those species that are not commonly reported as fatalities at wind farms. For each area, the scores of all species likely to occur within the project boundary were summed and then divided by the number of species to provide a relative index of occurrence and risk. A ranking index of less than 0.75 was considered low, 0.75-1.00 moderate, and greater than 1.00 high.

Species Ranking Index Assumptions

- Risk of mortality is equal for a given species across its range. *Example:* For a hoary bat, the risk of collision with a wind turbine in Kansas is equal to that in West Virginia.
- Data on distribution and occurrence accurately reflects current species distribution.

6.6 Species Landscape Index

Biological Justification

Landscapes that provide greater amounts of available and suitable roosting and foraging habitat have a greater probability for bats to occur (Duchamp et al. 2004, Lacki et al. 2007). However, the threshold at which landscapes become more attractive to bats remains unclear and makes predicting species occurrence difficult (Jaberg and Guisan 2001, Duchamp et al. 2004). Therefore, some assumptions about attractiveness were necessary. First, the assumption was made that attractiveness was based on the presence of the FAM. Second, it was assumed that bats make landscape-based decisions based on an area within 3 miles of the WEP (Table 1).

Scoring

The objective of this index was to recognize the attractiveness of habitat within a landscape. Areas that have a greater amount of suitable foraging and roosting habitat, expressed as FAM, than that of their surrounding areas may have a greater potential for species to occur. First, the amount of FAM in the WEP was compared to the amount of FAM within 3 miles outside of the project. Those values were divided by the total size of their respective areas, in acres, and a habitat index (HI) was produced, using:

$$HI = \left(\frac{FAMI / PA}{FAMO / BA} \right)$$

Where FAMI is the amount of FAM inside the WEP, PA is the total area of the project, FAMO is the amount of FAM outside the WEP and BA is the total area of the 3-mile buffer surrounding the project. This index provided a habitat index value where values:

> 1.0 indicate that the total acres of FAM inside the WEP is greater then the surrounding area; hence, more unique and potentially more attractive to bats; and,

< 1.0 indicate that the total acres of FAM inside the WEP is less then the surrounding area; hence, less unique and potentially less attractive to bats.

This value was multiplied by the potential number of species (P) occurring in the WEP and a species landscape index (SL) was calculated as:

$$SL = \sum P * HI$$

A landscape index of less than 5 was considered low, 5-10 moderate, and greater than 10 high.

Species Landscape Index Assumptions

- The suitability and availability of FAM habitat is restricted to distinct project and buffer boundaries.
- The spatial distribution of bat species and the scale of their decision making coincide with the boundaries of the WEP and 3-mile buffer.
- Patch dynamics are not influencing bat behavior.
- The increasing uniqueness of habitat in the landscape increases the attractiveness to bats.

7.0 CIMARRON WEP ASSESSMENT AND SUMMARY

Overall, there is a low likelihood of occurrence for bats at the WEP (Table 4). The WEP contains 97.4 acres of FAM (0.8% of WEP; Table 2; Figure 3) and the 3-mile buffer contains 159.9 acres (0.3% of buffer). The total FAM within the WEP and the 3-mile buffer equals 257.3 acres which equates to a FAM ranking of low. No natural areas occur within 3 miles of the WEP; therefore, the ranking for the natural areas variable is low. There are no perennial streams within the WEP; therefore, the ranking for this variable is low. The 3-mile buffer intersects with the Town of Cimarron; therefore, the ranking for the human development variable is low. The WEP has a moderate species ranking index of 0.68 (7.5/11), based on the likelihood of encounter for the 11 species whose ranges overlap with the WEP (Table 3). The WEP contains proportionally more bat habitat than the surrounding landscape (Figure 3); therefore, the habitat index (HI) is calculated to be 2.74. As there are eleven species of bats that could potentially occur within the WEP; therefore, the species landscape index (SL) is 30.14 and ranked as high (Table 4). Although the WEP contains a low absolute amount of potentially suitable bat habitat, it contains almost three times as much habitat as the surrounding buffer, indicating a relative attractiveness of the habitat within WEP to the 11 bat species that could potentially be found using or traveling through the WEP. Most of this potentially attractive habitat is found in the northeast corner of the WEP (Figure 3).

8.0 LITERATURE CITED

American Society of Mammologists (ASM). 2007. Mammals of Kansas. http://www.mammalsociety.org/statelists/ksmammals.html. *Accessed:* 8 February 2010.

Arnett, E.B., W. K. Brown, W.P. Erickson, J. K. Fiedler, B. L. Hamilton, T. H. Henry, A. Jain, G. D. Johnson, J. Kerns, R. R. Koford, C. P. Nicholson, T. J. O'Connell, M. D. Piorkowski, and R. D. Tenkersley, Jr. 2008. Patterns of bat fatalities at wind energy facilities in North America. Journal of Wildlife Management 72:61-78

Barbour, R.W., and Davies, W.H. 1969. Bats of America. University of Kentucky Press, Lexington, KY.

Bat Conservation International (BCI). 2001. Bats in eastern woodlands. Austin, TX.

Bat Conservation International (BCI). 2009. Species profiles of North American bats. Accessed at 7 October 2009: http://www.batcon.org/index.php/all-about-bats/species-profiles.html.

Bell, G.P. 1980. Habitat use and response to patches of prey by desert insectivorous bats. Canadian Journal of Zoology 58:1876-1883.

Block, W.M., and L.A. Brennan. 1993. The habitat concept in ornithology: theory and applications. In Current Ornithology (D.M. Power, ed.). Plenum Press, New York, NY

Carter, T.C., S.K. Carroll, J.E. Hofmann, J.E. Gardner, and G.A. Feldhamer. 2002. Landscape analysis of roosting habitat in Illinois. In The Indiana Bat: Biology and Management of an Endangered Species (A. Kurta and J. Kennedy, eds.). Bat Conservation International, Austin, TX.

Carter, T.C., and J.M. Menzel. 2003. Behavior and day-roosting ecology of North American foliage-roosting bats. In Bat Ecology (T.H. Kunz and M.B. Fenton eds.). University of Chicago Press, Chicago, IL.

Cryan, P.M. 2003. Seasonal distribution of migratory tree bats (*Lasiurus* and *Lasionycteris*) in North America. Journal of Mammology 84:579-593.

Duchamp, J.E., D.W. Sparks, and J.O. Whitaker Jr. 2004. Foraging-habitat selection by bats at an urban-rural interface: comparisons between a successful and a less successful species. Canadian Journal of Zoology 82:1157-1164.

Everette, A.L., T.J. O'Shea, L.E. Ellison, L.A. Stone, and J.L. McCance. 2001. Bat use of a high-plains urban wildlife refuge. Wildlife Society Bulletin 29: 967-973.

Evelyn M.J., D.A. Stiles, and R.A. Young. 2004. Conservation of bats in suburban landscapes: roost selection by *Myotis yumanensis* in a residential area in California. Biological Conservation 103:237-245.

Fleming, T.H., and P. Eby. 2003. Ecology of bat migration. In Bat Ecology (T.H. Kunz and M.B. Fenton eds.). University of Chicago Press, Chicago, IL

Hayes, J.P., and S. Loeb. 2007. The influences of forest management on bats in North America. In Bats in Forests: Conservation and Management (M.J. Lacki, J.P. Hayes, and A. Kurta, eds.). John Hopkins University Press, Baltimore, MD.

Henry, M., D.W. Thomas, R. Vaudry, and M. Carrier. 2002. Foraging distances and home range of pregnant and lactating little brown bats (*Myotis lucifugus*). Journal of Mammology 83:767-774.

Hutchinson, J.T., and M.J. Lacki. 2000. Foraging behavior and habitat use of red bats in mixed mesophysic forests of the Cumberland Plateau, Kentucky. Journal of Wildlife Management 64:87-94.

Jaberg, C., and A. Guisan. 2001. Modelling the distribution of bats in relation to landscape structure in a temperate mountain environment. Journal of Applied Ecology 38:1169-1181.

Jain, A.A. 2005. Bird and bat behavior and mortality at a northern Iowa windfarm. M.S. Thesis, Iowa State University, Ames, Iowa.

Johnson, G.D. 2004. Bat ecology related to wind development and lessons learned about impacts on bats from wind development: A review of bat impacts at wind farms in the U.S. In RESOLVE. 2004. Proceedings of the Wind Energy and Birds/Bats Workshop: Understanding and Resolving Bird and Bat Impacts. 2004. Washington, D.C.

Johnson, G.D. 2005. A review of bat mortality at wind-energy development in the United States. Bat Research News 46:45-49.

Johnson, G.D., M.K. Perlik, W.P. Erickson, and M.D. Strickland. 2004. Bat activity, composition, and collision mortality at a large wind plant in Minnesota. Wildlife Society Bulletin 32:1278-1288.

Kansas Department of Wildlife and Parks (KDWP). 2008. http://kdwp.state.ks.us/news/Other-Services/Threatened-and-Endangered-Species/Threatened-and-Endangered-Species/County-Lists. Accessed 19 March 2010.

Kerns, J., and P. Kerlinger. 2004. A study of bird and bat collision fatalities at the Mountaineer Wind Energy Center, Tucker County, West Virginia. FPL Energy and Mountaineer Wind Energy Center Technical Review Committee. Curry and Kerlinger LLC.

Kunz, T.H. 1982. Roosting ecology of bats. In Ecology of bats (T.H. Kunz ed.). Plenum Press, New York, NY.

Kunz, T.H., and L.F. Lumsden. 2003. Ecology of cavity and foliage roosting bats. In Bat Ecology (T.H. Kunz and M.B. Fenton, eds.). University of Chicago Press, Chicago, IL.

Kunz, T.H., E.B. Arnett, B.M. Cooper, W.P. Erickson, R.P. Larkin, T. Mabee, M.L. Morrison, M.D. Strickland, and J.M. Szewczak. 2007. Assessing impacts of wind-energy development on nocturnally active birds and bats: a guidance document. Journal of Wildlife Management. 71:2449-2486.

Lacki, M.J., J.P. Hayes, and A. Kurta, eds. 2007. Bats in Forests: Conservation and Management. John Hopkins University Press, Baltimore, MD.

National Wind Energy Coordinating Committee (NWCC). 2004. Wind turbine interactions with birds and bats: a summary of research results and remaining questions. Fact sheet: second edition.

NatureServe. 2008. NatureServe Explorer: An online encyclopedia of life [web application]. Version 6.2. NatureServe, Arlington, Virginia.

National Research Council (NRC). 2007. Environmental impacts of wind energy projects. The National Academies Press, Washington, D.C.

Pierson, E.D. 1998. Tall trees, deep holes, and scarred landscapes: conservation biology of North America bats. In Bat Biology and Conservation (T.H. Kunz and P.A. Racey, eds.). Smithsonian Institute Press, Washington, D.C.

Piorkowski, M. 2006. Breeding bird habitat use and turbine collisions of birds and bats located at a wind farm in Oklahoma mixed-grass prairie. M.S. Thesis, Oklahoma State University, Stillwater, OK.

Rydell, J. 1992. Exploitation of insects around streetlamps by bats in Sweden. Functional Ecology 6:744-750.

Swier, V.J. 2003. Distribution, roost site selection, and food habits of bats in eastern South Dakota. M.S. Thesis. South Dakota State University, Brookings, SD.

Tetra Tech EC, Inc. (Tetra Tech). 2008. Critical Issues Analysis for the Cimarron Wind Energy Project, Gray County, Kansas. Finalized November 2008.

Tuttle, M.D. 2004. North American Conservation Partnership State Planning Guide for Bats. North American Conservation Partnership and Bat Conservation International.

United States Fish and Wildlife Service (USFWS). 2006. Classification of Wetlands and Deepwater Habitats of the United States. U.S. Department of the Interior, Fish and Wildlife Service, Washington, DC. FWS/OBS-79/31. Available at: http://www.fws.gov/nwi.

United States Geological Survey (USGS). 2007. National Land Cover Database 2001. Available at http://www.mrlc.gov/.

Waldien, R.D., and J.P. Hayes. 2001. Activity areas of female long-eared myotis on coniferous forests in western Oregon. Northwest Science 75:307-314.

Western Bat Working Group (WBWG). 2009. Regional bat species priority matrix. Retrieved 23 July 2009 from http://wbwg.org/speciesinfo/species_matrix/species_matrix.html

Wilhide, J.D., M.J. Harvey, V.R. McDaniel, and V.E. Hoffman. 1998. Highland pond utilization by bats in the Ozark National Forest, Arkansas. Journal of the Arkansas Academy of Sciences 52:110-112.

TABLES

Table 1. Life history, behavior and habitat preferences of bat species for the Cimarron WEP, Kansas*.

English Name	Scientific Name	Listing Status	Abundance and KS distribution	Habitat/Foraging Habits	Summer Maternity Colony Size	Bachelor Summer Roosts	Winter Hibernacula Colony Size	Winter Roosts or Hibernacula
big brown bat	*Eptesicus fuscus*	None	Common year-round resident. Statewide	A generalist, most common in deciduous forests. Adapted to human development. Forages over land and water, open areas and forests. Aerial hawking.	25–75 individuals.	Roosts in hollow trees, crevices in cliffs, buildings, bridges and bat houses.	Rarely more than a few hundred individuals.	Winters in caves, mines, and man-made structures.
eastern red bat	*Lasiurus borealis*	None	Common migratory species. Statewide	Conifer and deciduous trees in floodplain preferred. Aerial hawking.	Small family groups of 2-3 individuals.	Roosts on foliage.	Solitary; groups up prior to migration.	Not believed to winter in Kansas.
hoary bat	*Lasiurus cinereus*	None	Common migratory species. Statewide	Conifer and deciduous trees in floodplain preferred. Found near water. Aerial hawking.	Small family groups of 2-3 individuals.	Roosts on foliage.	Solitary; groups up prior to migration.	Not believed to winter in Kansas.
northern myotis	*Myotis septentrionalis*	None	Common. Eastern half and north central portions of state	Associated with large forest galleries in floodplains, plains and badland habitat. Forages in the area of the tree canopy. Aerial hawking and gleaning insects.	Typically small numbers (5 individuals) but has been documented as up to 75 individuals in the forested areas.	Diverse range of roost substrates: tree cavities, under loose bark, in buildings, caves, mines. Seeks cooler temperatures.	Rarely more than a hundred individuals per hibernation colony.	Winters in caves and mines.
cave myotis	*Myotis velifer*	None	Uncommon year-round resident. South-central quarter of the state.	Deserts, grasslands, frequents watercourses.	Wide range from 50 to 15,000+. Average 2,000 to 5,000.	Roosts in caves and mines. In summer occasionally in buildings.	Large clusters, up to thousands.	Winters in caves, mines, and tunnels. Prefers moist situations.
tri-colored bat	*Perimyotis subflavus*	None	Uncommon year-round resident. Eastern third and southeast half of the state.	Weak erratic flyers, early evening foragers, often over water or shaded groves.	30-35 individuals.	Little known, probably solitary, roosts in crevices, caves, and mines.	Usually solitary.	Winters in caves and mines.
pallid bat	*Antrozous pallidus*	Kansas Species in Need of Conservation	Uncommon year-round resident. South-central edge of state.	Arid deserts or grasslands, often near rocky outcrops and water.	Usually small, but up to 200+ individuals, sometimes include males.	Roosts in rock crevices or buildings, less often in caves, tree hollows, and mines.	Solitary or in small groups.	Narrow fissures in mines, caves, and buildings.
Townsend's big-eared bat	*Corynorhinus townsendii*	Kansas Species in Need of Conservation	Uncommon year-round resident. Southwest eighth of the state.	Mesic habitats with mosaic of woodland, grassland, and/or shrubland.	Up to 200 in the west U.S. and 1000 in the east U.S.	Caves, buildings, and tree cavities.	Wide range from solitary to several hundred.	Caves and mines, prefers cold areas, often near entrances.

Table 1. Life history, behavior and habitat preferences of bat species for the Cimarron WEP, Kansas*.

English Name	Scientific Name	Listing Status	Abundance and KS distribution	Habitat/Foraging Habits	Summer Maternity Colony Size	Bachelor Summer Roosts	Winter Hibernacula Colony Size	Winter Roosts or Hibernacula
Mexican free-tailed bat	*Tadarida brasiliensis*	None	Common year-round resident Statewide	Prefers desert, shrublands, and grasslands. Crepuscular, typically feeds within 50-miles of day roost, but up to 150 miles recorded.	Large colonies, sometimes > 1 million bats. Maternities less than 20,000 often are abandoned.	Abandoned buildings, caves, ridges, and rock outcrops. Sometimes cliff swallow nests.	Little known, smaller colonies than maternity roosts, some remain active overwinter in southeastern U.S.	Winters in mines and caves.
silver-haired bat	*Lasionycteris noctivagans*	None	Common. Statewide	Found in forested areas, most abundant in mature conifer forests. Forages over ponds and streams in woods. Aerial hawking.	6-65 individuals.	Roosts on tree foliage, tree cavities and under loose bark.	Usually solitary.	Winters in small tree hollows, underneath bark, in woodpiles and cliff faces.
western small-footed myotis	*Myotis ciliolabrum*	None	Uncommon year-round resident Western tenth and northwest corner of the state.	Associated with cliffs and rock canyons in arid areas. Also found in ponderosa pine and mixed conifer forests. Aerial hawking and gleaning over rocks.	Solitary or 2–6 individuals.	Roosts in rock crevices, under boulders, sometimes under bark.	Small numbers usually between 1-6 individuals.	Winters in abandoned caves and mines as well as crevices in rocks.

* *Sources*: ASM 2007, Lacki et al. 2007, NatureServe 2008, Swier 2003, WBWG 2009

Table 2. Total amount of forest-aquatic matrix (FAM) habitat and percent composition within the Cimarron WEP and the respective 3-mile buffer.

Area	Size of Area (acres)	Acres of FAM	% FAM in Area
Cimarron WEP	12,450	97.4	0.8
Cimarron WEP buffer	56,002	159.9	0.3

Table 3. Ranked scoring system used to develop species risk index for bat species found in southwest Kansas.

Common Name	Score	Justification
hoary bat	1.25	Migratory tree bat. Commonly documented mortality at wind facilities (Johnson et al. 2004, Kunz et al. 2007, Arnett et al. 2008).
eastern red bat	1.25	Migratory tree bat. Commonly documented mortality at wind facilities (Johnson et al. 2004, Kunz et al. 2007, Arnett et al. 2008).
silver-haired bat	1.25	Migratory tree bat. Commonly documented mortality at wind facilities (Johnson et al. 2004, Kunz et al. 2007, Arnett et al. 2008).
Mexican free-tailed bat	1.00	Common species statewide. Documented mortality at a nearby wind farm in Oklahoma (Piorkowski 2006; Arnett et al. 2008).
big brown bat	0.75	Local breeder but low levels of mortality documented (Arnett et al. 2008).
tri-colored bat	0.50	Highest mortality of locally-breeding species at wind facilities (Arnett et al. 2008); however uncommon in Kansas and WEP is located on the margin of the known distribution range of this species.
Townsend's big-eared bat	0.50	Range overlap with WEP. No documented fatalities at wind facilities.
cave myotis	0.25	Uncommon species in Kansas and WEP is located on the margin of the known distribution range of this species. No documented fatalities at wind facilities.
pallid bat	0.25	WEP located on the margin of the known distribution range of this species and it forages almost exclusively on the ground. No documented fatalities at wind facilities.
western small-footed myotis	0.25	Uncommon species in Kansas. No documented fatalities at wind facilities.
northern myotis	0.25	WEP located on the margin of the know distribution range of this species. No documented fatalities at wind facilities.
Total	**7.50**	

Table 4. Summary statistics for each variable used in the analysis for the Cimarron WEP.

Element	Value	Ranking
Forest-Aquatic Matrix (FAM)	257.3 acres	Low
Number of natural areas within 3 miles	0	Low
Perennial streams present	0	Low
Number of residential communities within 3 miles	1	Low
Species ranking index	0.68	Moderate
Species landscape index (SL)	30.14	High

FIGURES

P:\CPV Renewable\Cimarron Wind - KS\GIS\Spatial\MXD\20100319_BatCraneAnalysis\Fig 1_Overview.mxd

TETRA TECH EC, INC.

Finney

FINNEY CO
HODGEMAN CO

BENTON

Hodgeman

SOUTH ROSCOE

F O O T E

GRAY CO
HODGEMAN CO
FORD CO

R O Y A L

Arkansas River

C I M A R R O N

GRAY CO
FORD CO

Arkansas River

L O C A T I O N M A P

L E G E N D

- WEP Boundary
- Highway
- State Boundary
- County Boundary

0 0.5 1 2 3 4
Miles

Scale 1:500000
(when printed on tabloid size paper)

Data Sources:
ESRI Streetmap 9.3

Figure 1.
Vicinity Map of Cimarron WEP
Phase 1

Kansas

Gray County
Kansas

CPV RENEWABLE ENERGY COMPANY, LLC

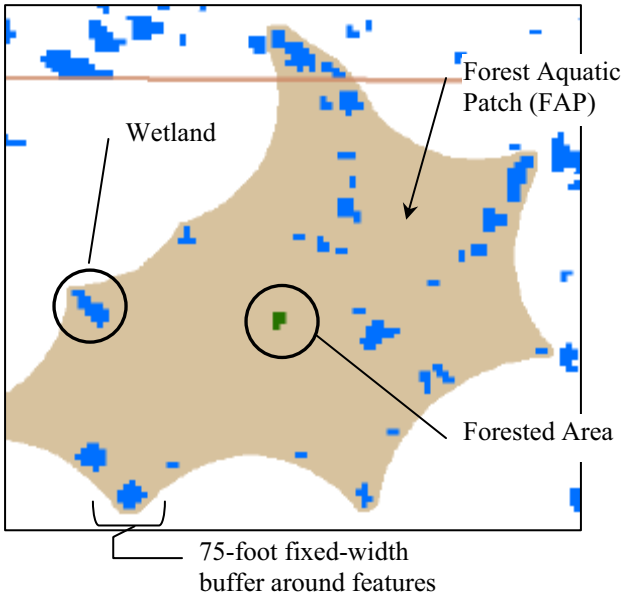

Figure 2. Representation of elements used to calculate FAP. Distance from the forested area is 0.8 mile. Multiple FAPs constitute the FAM.

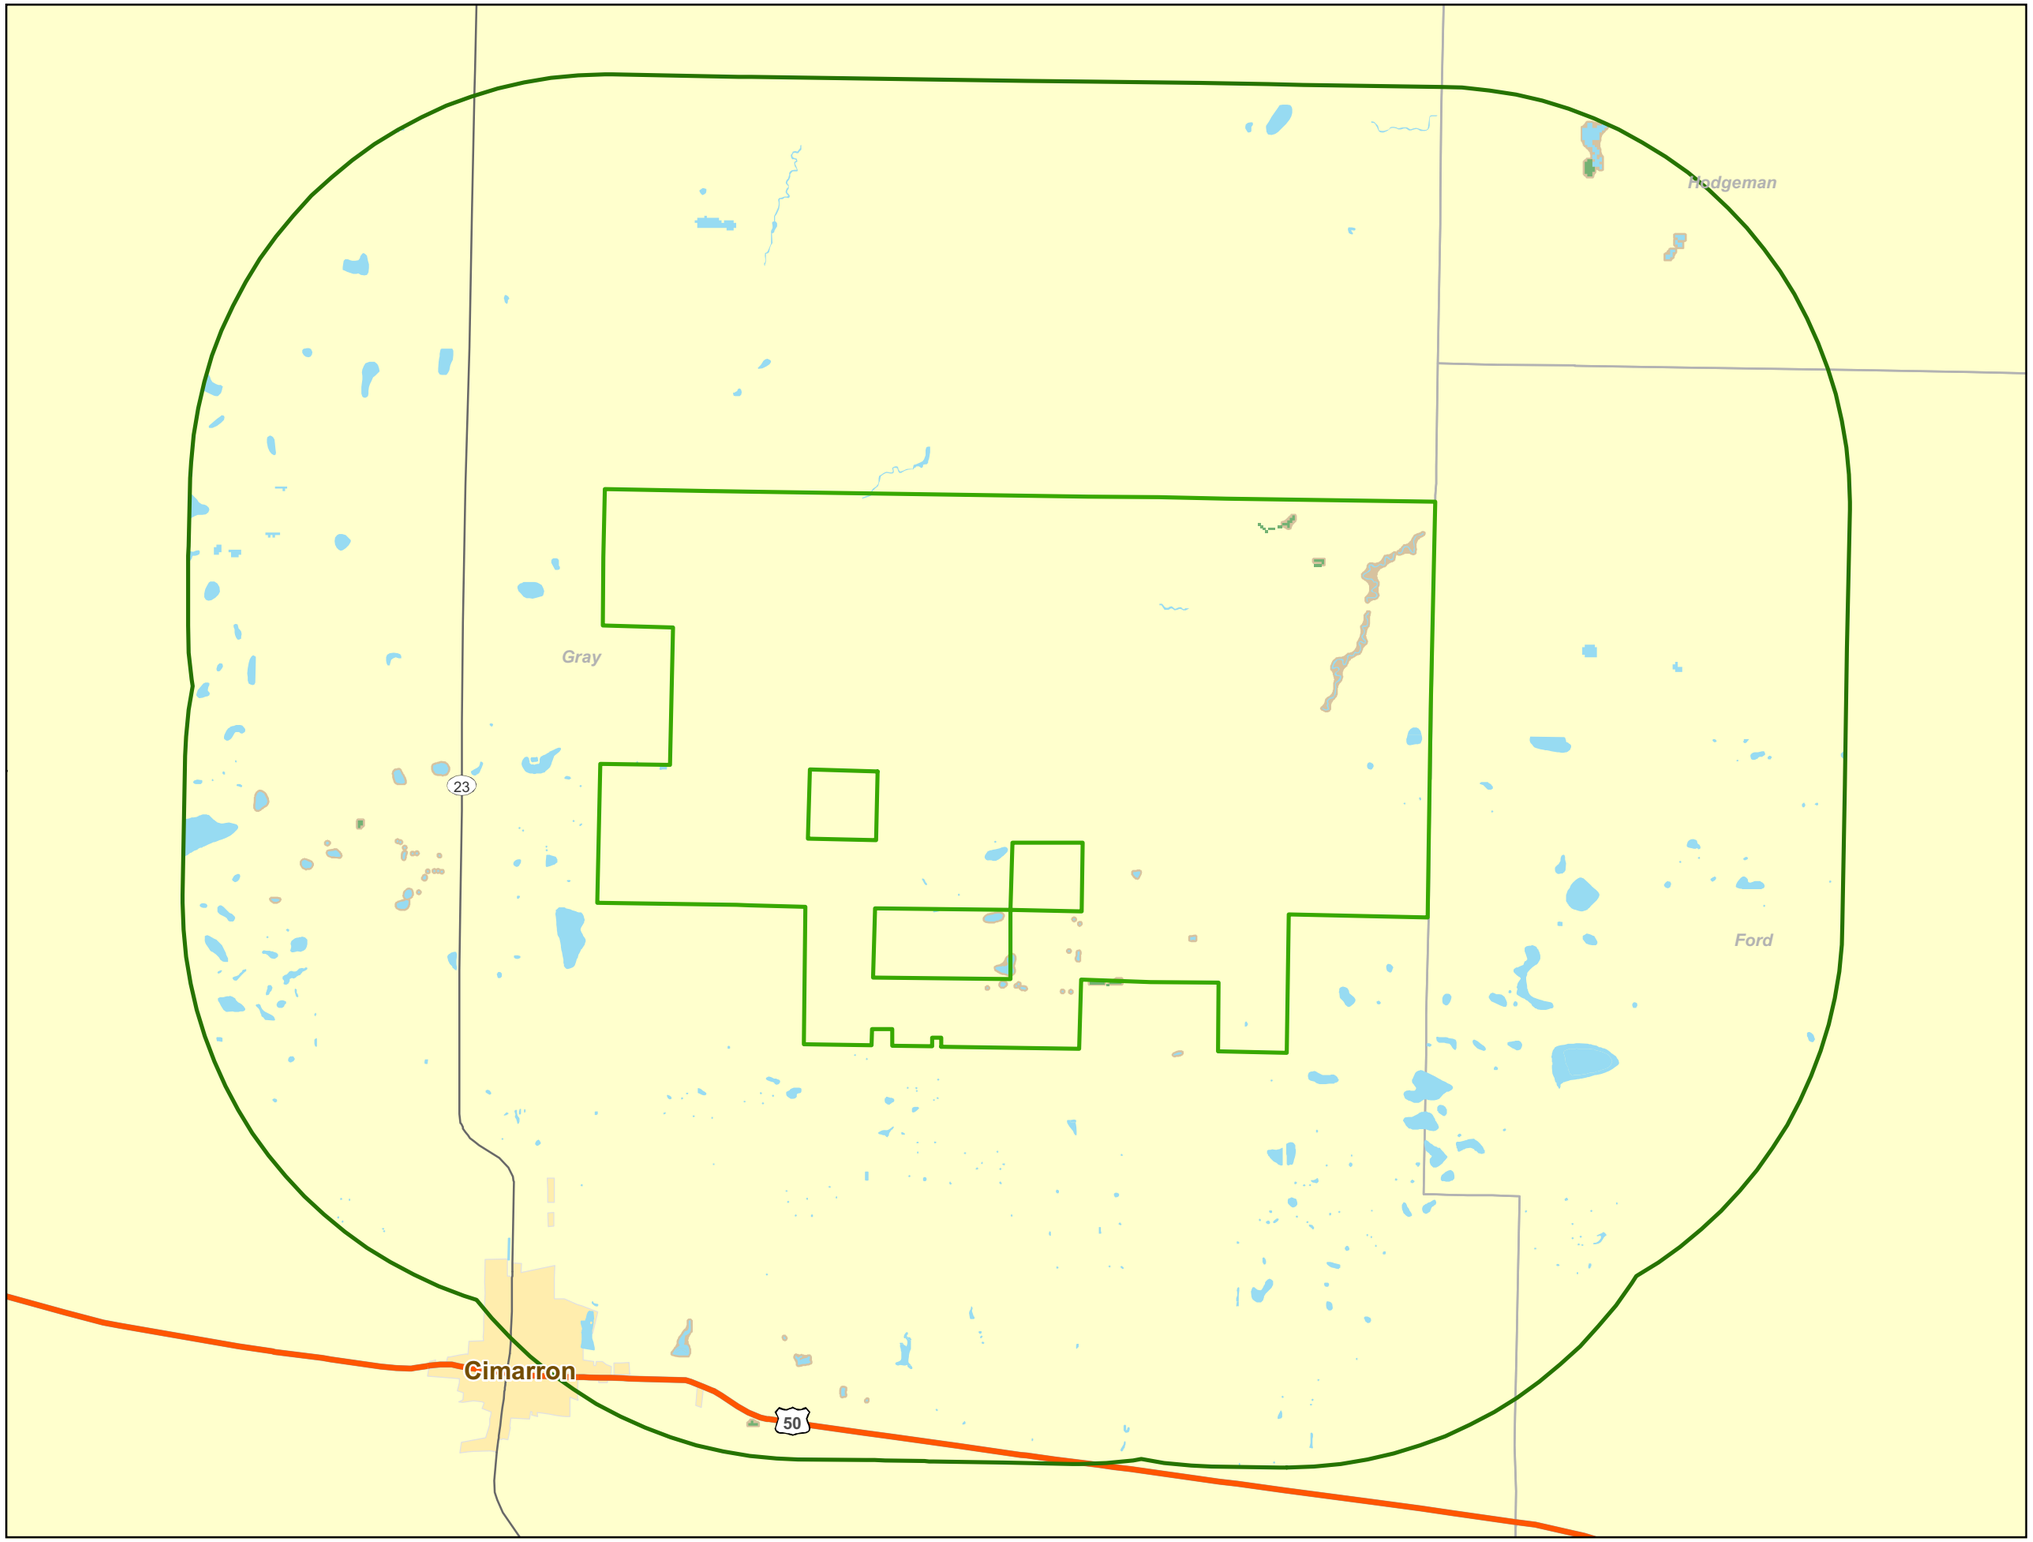

Figure 3.
Cimarron Wind Energy Project
Phase 1
Bat Habitat Map

Gray County
Kansas

L E G E N D

- Forest Aquatic Matrix
- Wetland
- Forest
- WEP Boundary
- 3-Mile Buffer
- Highway
- Major Road
- Local Road

Data Sources:
NWI Wetland Data
NLCD Data
ESRI Streetmap 9.3

0 0.5 1 1.5 2
Miles

L O C A T I O N M A P

File: P:\CPV Renewable\Cimarron Wind - KS\GIS\Spatial\MXD\20100430_BatCraneAnalysis\Figure3_Cimarron_BatHabitat.mxd
Prepared By: william.scales
Coordinate System: NAD 1927 UTM Zone 14N